



It's love at first sight

# Discover a romance that never fades!

You are sure to fall in love with Vivanta Solid Surfaces If not for the stunning colours of the collection, then perhaps for the smooth, seamless edges or ability to complement a range of materials like wood, metal, glass and laminate. Versatile and malleable it is a surface that allows you to bring your design ideas into reality. The versatility of Vivanta Solid Surface makes it a smart and beautiful solution for a wide variety of applications like residential kitchen countertops, office furniture, high-end retail or hospitality surfacing and functional healthcare spaces.

Vivanta is naturally resistant to fade, heat, mold, mildew and most stains; What's more it is easily renewable. Even tough stains are easily buffed away. It is truly easy to live with Vivanta Solid Surfaces. The cleanup is a snap and there are no pores or seams to harbour stains or bacteria. And the certified installation comes with a Vivanta Solid Surface 10 year limited warranty. Explore the possibilities of Vivanta Solid Surfaces - get inspired and then impress others.























**Durable** - They are impervious to scratches, chemicals and cooking stains. Immune to Sun rays and harsh weather conditions.

**Hygienic** - Non porous and seamless Vivanta does not harbour dirt and bacteria which makes them ideal for kitchens, restaurants and healthcare facilities.

**Peace of mind, guaranteed** - With Vivanta forget the maintenance woes. They are easy to clean, easy to care for and a joy to live with.


**Colours galore** - The colours of Vivanta are a visual treat and will leave you spoilt for choice.

**Dream Big** - Vivanta's unique characteristics makes it ideal for a plethora of both interior and exterior applications. Vivanta provides absolute freedom to the designer.


**Assurance of Quality** - Vivanta surfaces are backed up with complete fabrication and installation support and a 10 year warranty.

# The excellent qualities of VIVANTA at a glance.


#### Design







Visually seamless joining of sheets and flush installation of sinks and basins




Spectacular light effects thanks to translucence


#### **Performance**




Robust and durable



Easy cleaning and exceptional hygiene properties




Free of emissions, formaldehyde and nanoparticles



Fire-resistant, impervious to liquids and resistant to germs and chemicals

#### **Fabrication**




Easy to process with hardwood tools Easy to restore and repair

### Sustainability



ir Off cu



Off cuts can be reused reducing waste




Recycled colours available

# LUXE



VLX108 SAND STROME

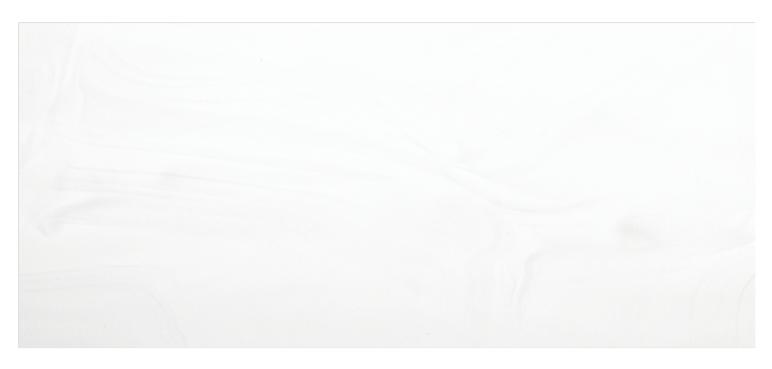




VLX101 WHITE ONYX



VLX108 SAND STROME



VLX104 WINTER ICE

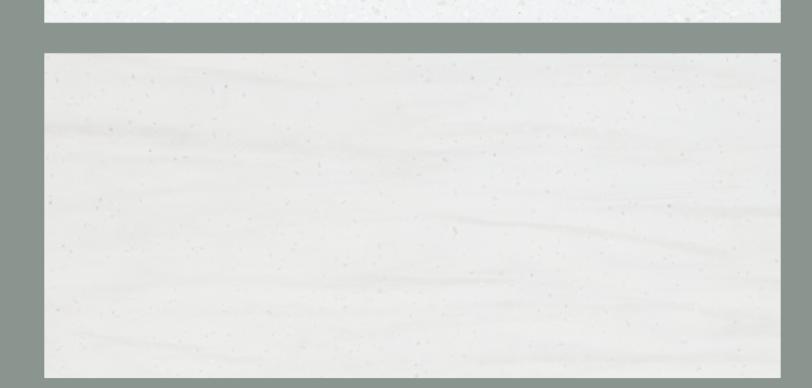

VLX106 WINTER WALKING





VLX105 TRAVERTINE



VLX107 ATLANTIC GREY



# LUXE







VLX110 BELLIZZI

VLX109 WHIPPED CREAM

VLX114 LAVIANO



# QUARTZ

VP105 SILVER BEACH





VP105 SILVER BEACH




VP104 ICE QUBE





VP106 GREY PEBBLE

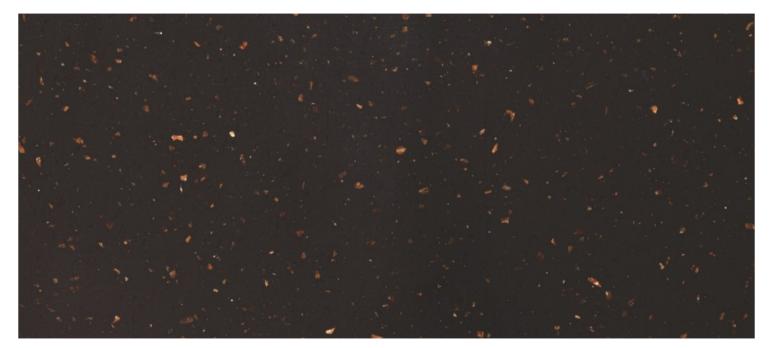

VP101 RADIANCE





# GRANITES

# **Sparkles**



SP01 SPARKLE WHITE



SP02 SPARKLE GRAY



SP03 SPARKLE BLACK

## **Granites**



VG20 RICE PAPER



VG14 SALT

# VIVANTA"

## **Granites**



VG22 LINEN



VG02 PURE ARCTIC



VG01 EVEREST



VG07 CRYSTAL



VG08 BEIGE SAND



VG04 ELEGANCE



VG05 GOLD SAND



VG18 RAFFIA



VG15 MIST



VG09 ULTRA CONCRETE



VG 12 SANDED CONCRETE



VG16 SAND CLAY



VG19 MUDDY



VG06 MOCHA CAFÉ



# PREMIUM

### Whites



VS06 ANTARCTIC WHITE

VS09 PREMIUM WHITE

### **Premium Solids**



VS12 NU CREAM



VS24 STEEL



VS14 GRAY



VS25 COFFEE



VS15 CONCRETE GRAY



VS26 MAGENTA



VS16 AY BLACK



VS27 CHARCOL



VS18 HOT



VS28 SPRING GREEN



VS19 SUN



VS29 MEDI BLUE



VS20 CITRUS ORANGE



VS30 STRAWBERRY WINE



VS22 KHAKHI




VS34 DIASY BLUE

### **Bright Solids**



VS31 MINT ICE



VS32 STRAWBERRY ICE



VS33 LIME ICE











# **Technical Specifications**

PHYSICAL PROPERTIES								
PROPERTY	TEST METHOD	UNIT	TYPICAL VALUES					
SPECIFIC GRAVITY((23/23) °C)	ASTM D792-13 (METHOD A)		1.74					
ROCKWELL HARDNESS (HRM)	ASTM D785-08(2015) (PROCEDURE A)	82						
BARCOL HARDNESS	ASTM D2583-13a		66					
FLEXURAL STRENGTH	ASTM D790-17(*) MPA		69.8					
FLEXURAL MODULUS OF ELASTICITY	ASTM D790-17(*)	GPA	9.97					
IZOD IMPACT STRENGTH	ASTM D256-10E1 (METHOD A)	J/M	23					
DEFLECTION TEMPERATURE UNDER LOAD (1.82 MPA)	ASTM D648-16 (METHOD B)	°C	100					
THERMAL EXPANSION	KS M 3015 : 2003	1/°C	4.1×10 <sup>-5</sup>					
TENSILE STRENGTH	ASTM D638-14(**)	MPA	45.4					
TENSILE MODULUS OF ELASTICITY	ASTM D638-14(**)	GPA	10.1					
WATER ABSORPTION RATE (24 H IMMERSION)	ASTM D570-98(2010)E1	%	0.05					

<sup>\*</sup> Speed of Testing: 6.2 mm/ min, Support Span: 230 mm

### PRODUCT SPECIFICATIONS

Whites	THICKNESS		WIDTH		LENGTH	
	mm	in	mm	in	mm	in
Premium Solids	6	1/4	760	30	2490	98
	12.0	1/2	760	30	3680	145
Bright Solids	6	1/4	760	30	2490	98
	12.0	1/2	760	30	3680	145
Sparkles	6	1/4	760	30	2490	98
	12.0	1/2	760	30	3680	145
Granites	6	1/4	760	30	2490	98
	12.0	1/2	760	30	3680	145

Disclaimer: The information contained herein is provided by Vivanta. and its subsidiaries and affiliates (collectively referred to as "Vivanta") for information purpose only and should be used by individuals with technical experience and knowledge in the area. Vivanta does not make any representation or warranties of the usefulness or expected result of the information, and does not assume any responsibility whatsoever related to use of the information. Exclusion of the implied warranties may not apply in certain jurisdictions.

<sup>\*\*</sup> Speed of Testing: 5 mm/ min, )Modulus: 1 mm/min), Specimen Type: Type I





















Website:



